

Digital depth models with fixed hook(s)


- INSTRUMENT
 - Robust construction to ensure longevity and stability of results over time
 - High degree of protection against dust and liquids (even when the data sending cap is connected)
- MEASUREMENT
 - Reading comfort with large high-contrast display
 - Comfortable handling with ergonomic grip for ease of use
- AUTONOMY
 - Long battery life avoiding too frequent battery changes
- DATA MANAGEMENT
 - Sending values to computer via TLC port (cable or wireless)




00530445

Standard	ISO 13385-2:2019
Maximum permissible errors	L = length in mm $0 < L \leq 100: \pm 20 \mu\text{m}$ $100 < L \leq 500: \pm 30 \mu\text{m}$
Material	Stainless steel
Particular characteristic(s)	Locking screw
Resolution	0,01 mm / .0005 in
Zero	Fixed
Degree of protection	IP67
Display	LCD, 11 mm
Power supply	Lithium battery, 3 V CR2032
Data output	TLC
Function(s)	Stand-by after 10 min ABS or DIFF mode Low battery indicator
Autonomy	12'000 h
Units	mm / in
Included in delivery	Battery (1x) Measuring report Declaration of conformity

Depth calipers

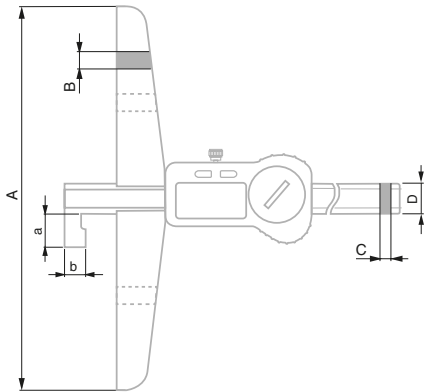

00530445 and 00530446

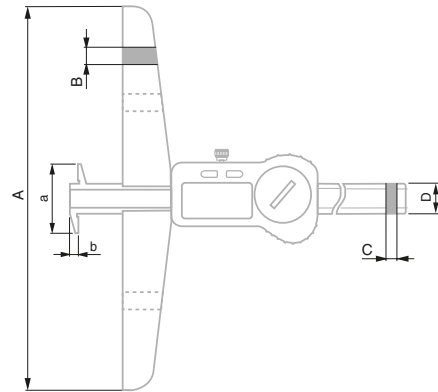

00530447

Part number	Measuring range, mm	Measuring range, in	Number of hook(s)	Data output	Degree of protection	A mm	B mm	C mm	D mm	a mm	b mm
00530445	300	12	1	TLC	IP67	150	8,5	4	15	15,5	10
00530446	500	20	1	TLC	IP67	150	8,5	4	15	15,5	10
00530447	300	12	2	TLC	IP67	150	8,5	4	15	27,5	5

Accessories

Part number	Designation
04760181	TLC-USB cable, 2 m
04760182	TLC-DIGIMATIC cable, 2 m
04760183	TLC-BLE Bluetooth® emitter + USB dongle receiver + 1,5 m extension cable set
04760184	TLC-BLE Bluetooth® emitter
04760185	USB receiver + 1,5 m extension cable
04981001	DATA-DIRECT software
04981002	STAT-EXPRESS software
DATA-VIEWER	Free data acquisition software
00560103	Removable bridge, 200 mm, for digital depth caliper
00560104	Removable bridge, 300 mm, for digital depth caliper
00560105	Removable bridge, 400 mm, for digital depth caliper
01961000	CR2032 button battery